

HOW THE CLICKMAT WORKS


1 Use clickmat to calibrate your tamping pressure



2 Place the portafilter on the center of the clickmat. Press with your tamper until it says click!



3 Before using for the first time, use the included allenkey to adjust the "click"-sensitivity (normally between 15-20 kg of pressure).

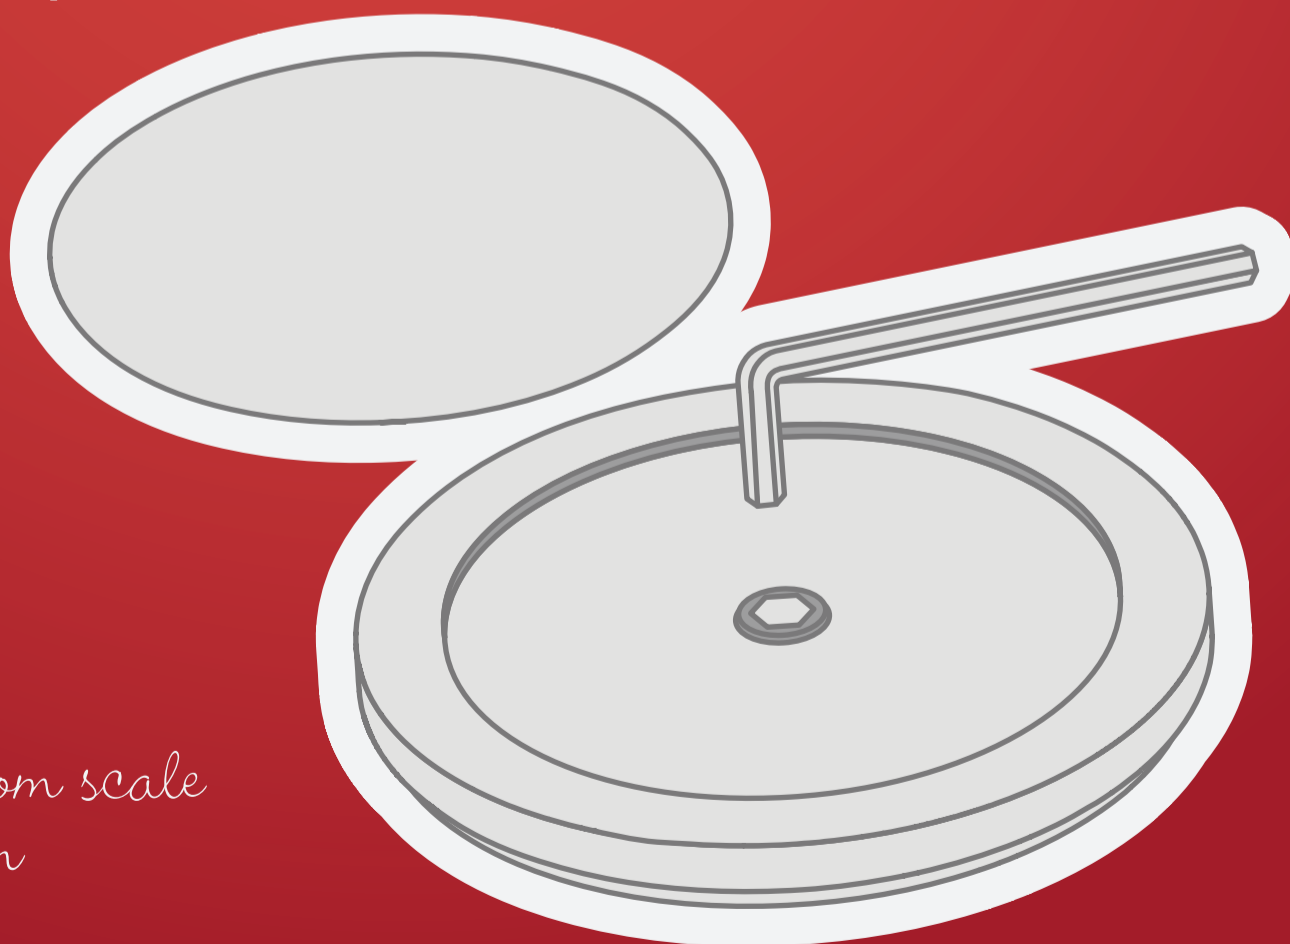

*Tip!
Use a bathroom scale
for calibration*